




WS58P20SMB-BH

Order Code: WS58P20SMB-BH

Power Transient Voltage Suppressor

Features

- 2000 watts Peak Pulse Power (10/1000µs)
- Bidirectional Protection
- Fast Response Time : Typically < 1ns
- Excellent Clamping Capability
- Glass Passivated Junction
- Built-in Strain relief
- Low inductance
- Low profile package
- High temperature solder:260°C/10 seconds at terminal

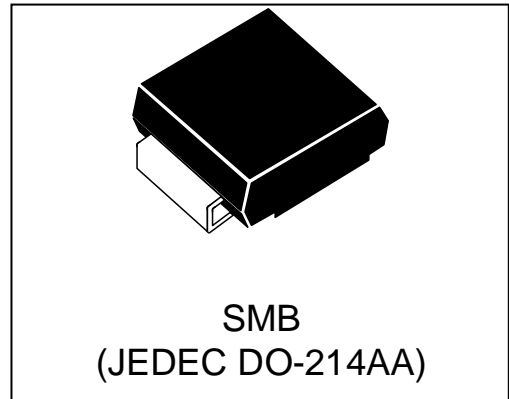

Mechanical Characteristics

- JEDEC DO-214AA package
- Molding compound flammability rating: UL 94V-0
- Marking : **2SMBJ58CAH**
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

Applications


- I/O Interfaces
- Power lines
- Automotive and Telecommunication
- Computers & Consumer Electronics
- Industrial Electronics

Absolute Maximum Rating			
Rating	Symbol	Value	Units
Peak Pulse Power (tp =10/1000µs) (see Note1,2)	P _{PPM}	2000	Watts
Peak pulse current (10/1000µs) (see Note2)	I _{PP}	22.0	A
Power Dissipation on infinite heat sink T _A = 50 °C (Fig4)	P _D	6.5	W
Operating Junction Temperature range	T _J	-65 to + 150	°C
Storage Temperature range	T _{STG}	-65 to + 150	°C

Note1: Peak Pulse Power Rating as Pulse Width ,per Fig1.

Note2: Peak Pulse Power or Current Derated above T_A=25°C Per Fig. 2 and Non-Repetitive Current Pulse,Per Fig.3.

Pin Configuration

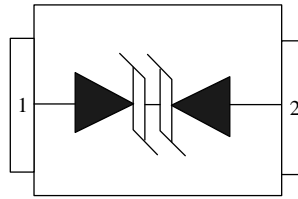

WS58P20SMB-BH						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				58	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	64.4		71.2	V
Reverse Leakage Current	I_R	$V_{RWM}=58V, T=25^{\circ}C$			1	μA
Clamping Voltage	V_C	$I_{PP}=22.0A, t_p=10/1000\mu s$			93.6	V

Typical Characteristics

Figure 1: Peak Pulse Power Rating Curve

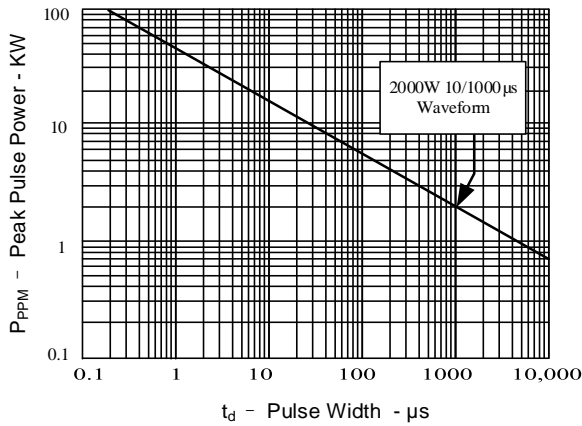


Figure 2: Pulse Derating Curve

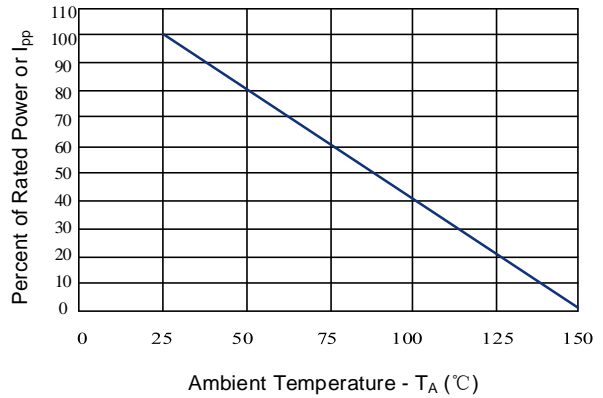


Figure 3: Pulse Waveform



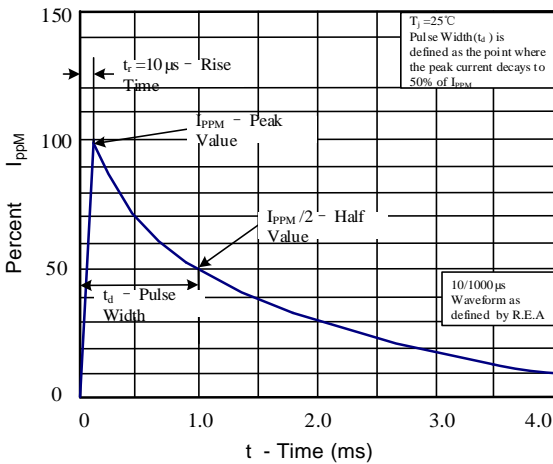


Figure 4: Steady State Power Dissipation Derating Curve

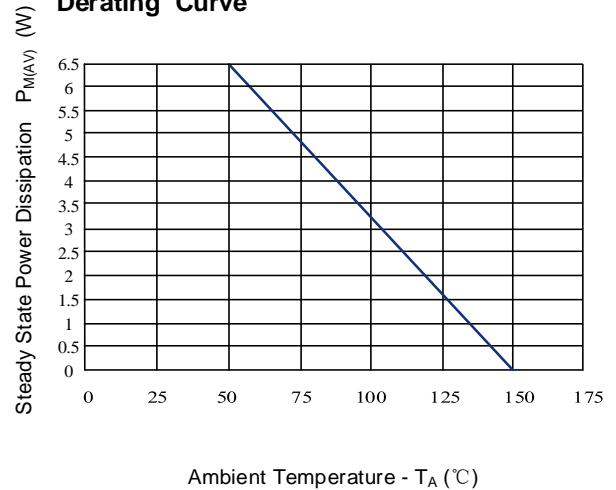


Outline Drawing – SMB(DO-214AA)

Ref. (mm)	Millimeters	
	Min.	Max.
A	2.130	2.440
A1	-	0.203
B	1.900	2.200
E	4.100	4.750
E1	5.210	5.590
D	3.300	3.940
L	0.760	1.520

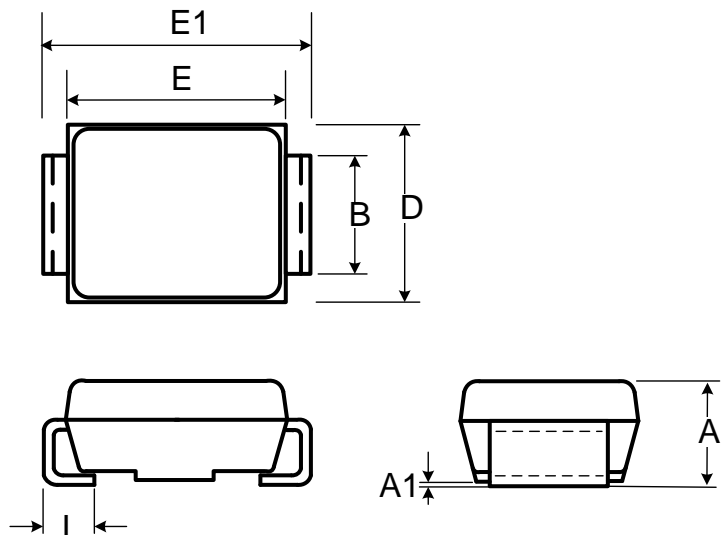

Recommended Solder Pad Layout

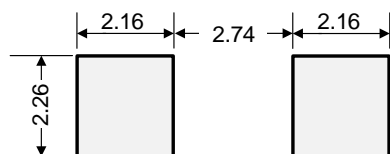

Dimensions in mm

Package Information

Package Type	Description	Quantity (pcs)	Standard
DO-214AA	Tape & Reel -12mm/13" tape	3000	EIA-481-D

Contact Information

CYG WAYON CIRCUIT PROTECTION CO., LTD.

No.1001, Shiwan(7) Road, Pudong District, Shanghai, P.R.China.201207

Tel: 86-21-68969993 Fax: 86-21-50757680 Email: market@way-on.com

WAYON website: <http://www.way-on.com>

For additional information, please contact your local Sales Representative.

CYGMAYON® are registered trademarks of Wayon Corporation.*Specifications are subject to change without notice.**The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.*